





 **Verso⁴** REVERSIBLE SEATPLATE HARNESS

Whilst Gin Gliders has made every effort at the time of publication to provide accurate information, product specifications are subject to change without notice and may vary from those shown.

CONTENTS

Verso ⁴

Thank You.....	4	Storage.....	27
Warning.....	5	Adjustments.....	28
About Gin Gliders.....	6	Guide to putting on the harness.....	32
Specifications.....	7	Attaching the flight deck.....	33
Verso 4 Features.....	8	Flying with the Verso 4.....	39
Before You Fly.....	11	Maintenanance and Repairs.....	42
Speedbar installation.....	12	Final Words.....	45
Seatplate installation.....	13	Harness Diagram.....	49
Back protector installation.....	14		
Maintening the back protector.....	15		
Support pillars installation.....	16		
Ballast container installation.....	17		
Rescue Installation.....	18		
Footpad installation.....	23		

THANK YOU

For choosing Gin Gliders. We are confident you'll enjoy many rewarding experiences in the air with your new GIN harness.

This manual contains important safety, performance and maintenance information. Read it before your first flight, keep it for reference, and please pass it on to the new owner if you ever re-sell your harness.

Any updates to this manual, or relevant safety information, will be published on our website:
www.gingliders.com.

You can also register for e-mail updates via our website product registration form.

Happy flying and safe landings,
GIN Team



WARNING

Like any extreme sport, paragliding involves unpredictable risks which may lead to injury or death. By choosing to fly, you assume the sole responsibility for those risks. You can minimize the risks by having the appropriate attitude, training and experience and by properly understanding, using and maintaining your equipment. Always seek to expand your knowledge and to develop self-reliance. If there is anything you do not understand, consult with your local dealer as a first point of contact, with the GIN importer in your country or with Gin Gliders directly.

Because it is impossible to anticipate every situation or condition that can occur while paragliding, this manual makes no representation about the safe use of the paragliding equipment under all conditions. Neither Gin Gliders nor the seller of GIN equipment can guarantee, or be held responsible for, the safety of yourself or anyone else.

Many countries have specific regulations or laws regarding paragliding activity. It's your responsibility to know and observe the regulations of the region where you fly.

INTENDED USE: *Lightweight air sports equipment with a maximum mass of less than 120kg, operated in the paragliding division.*

ABOUT GIN GLIDERS

DREAM

In forming Gin Gliders, designer and competition pilot Gin Seok Song had one simple dream: to make the best possible paragliding equipment that pilots all over the world would love to fly—whatever their ambitions.

At Gin Gliders, we bring together consultant aerodynamists, world cup pilots, engineers and paragliding school instructors, all dedicated to fulfilling this dream.

TOUCH

We're a "hands-on" company that puts continuous innovation and development at the center of everything we do.

At our purpose-built R&D workshop at head office in Korea, we are able to design, manufacture, test-fly and modify prototypes all in a matter of hours. Our international R&D team is on hand both in Korea and at locations worldwide. This guarantees that your equipment has been thoroughly tested to cope with the toughest flying conditions.

Our own production facilities in East Asia ensure the quality of the finished product and also the well-being of our production staff.

BELIEVE

We believe that the product should speak for itself. Only by flying can the pilots understand their equipment and develop trust and confidence in it. From this feeling comes safety, comfort, performance and fun. The grin when you land should say it all!



GIN

SPECIFICATIONS

SIZE	XS	S	M	L	XL
Pilot height (cm)	<165	160-175	170-185	180-190	>185
Total harness weight (kg)	2.915	2.963	3.095	3.233	3.304
Weight of harness (kg)	2.395	2.443	2.555	2.663	2.734
Weight of rucksack (kg)	0.52	0.52	0.54	0.57	0.57
Rucsack volume (L)	65	65	75	75	75
Rescue container volume (cm3)	4700	4700	5000	5200	5400
Certification	EN/LTF/CE	EN/LTF/CE	EN/LTF/CE	EN/LTF/CE	EN/LTF/CE

CERTIFICATION

The Verso 4 has EN certification, max load 120daN.
Certification Number:

DELIVERY PACKAGE

- 1 rucksack bag (540g M size)
- 1 Rescue handle and inner container (50g)
- 1 Rescue bridle (35g)
- 2 Carabiner (120g)
- 1 Speedbar (2 step) (100g)



FEATURES **VERSO 4**

1 LIGHTNESS

The Verso4 has significantly reduced weight compared to its predecessor. This improvement is the result of a careful selection of fabrics and materials, as well as a redesigned structural frame system that maintains the same level of comfort while drastically lowering the harness's weight. The materials strike an excellent balance between weight and durability. The reduction in weight also contributes to a smaller packed volume, meaning the available space inside the rucksack is noticeably increased compared to the previous version.

2 SAFETY

As usual safety is a priority for Gin Gliders. The Verso 4 has achieved a very good drop test result of 26.6g. The under-seat reserve with shoulder attachment points offers the best safety during a rescue deployment. The rescue container has been redesigned to aid a more efficient opening and closing sequence especially in higher G situations. The T-lock get up safety system helps decrease the risk of pilots forgetting to connect the leg straps. We improved the pre-inflation system of the airbag, so the pilot will be protected even during the take off phase, thanks to the titanium wire located on the bottom of the airbag.

3 QUALITY

Choosing only the best quality materials, buckles, zippers and state of the art fabrics.

4 COMFORT

The new rucksack layout has greatly improved the comfort and load distribution while carrying the harness, the rucksack is also removable through a zipper. The Verso 4 comes with a seat plate which allows for precise weight-shift and comfort for longer flights. The Verso 4 is our most versatile harness, suitable for pilots from the training hill to cross country and even hike and fly. The new geometry offers improved stability in the turn while also dampening out turbulence to give the pilot a more comfortable feeling.



BEFORE YOU FLY

Make sure your dealer / instructor has checked the harness for completeness and basic settings.






Your harness must be assembled by a suitably qualified paragliding professional, for example, your instructor.

Gin Gliders recommends that assembly be carried out in the following order. If you are in any doubt whatsoever about this procedure, please seek professional advice from your instructor, GIN dealer or importer.

INSTALLING THE SPEED SYSTEM

Assemble the speed system from top to bottom. Pass the chord along the inside of the harness and route it through the Speed pulley (1). From the pulley, route the chord through the second pulley at the bottom edge of the seat (2). Route the chord through the final metal ring and connect to the speed bar (3). Connect and adjust the supplied elastic chord to fix the speedbar to the foot plate for easy access.



! CAUTION: Make sure that the speed system is not too short. The front risers of your paraglider must not be pulled down in normal (unaccelerated) flight.

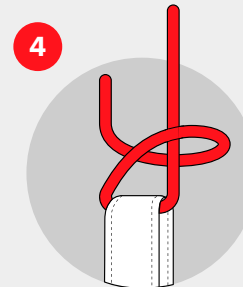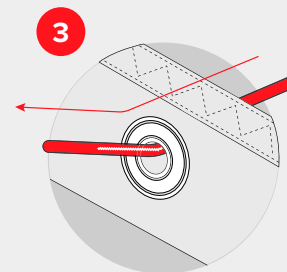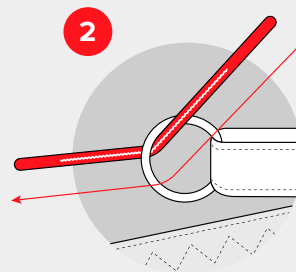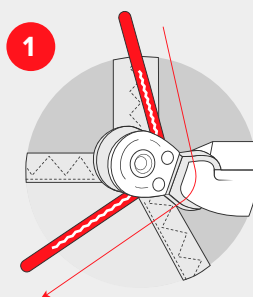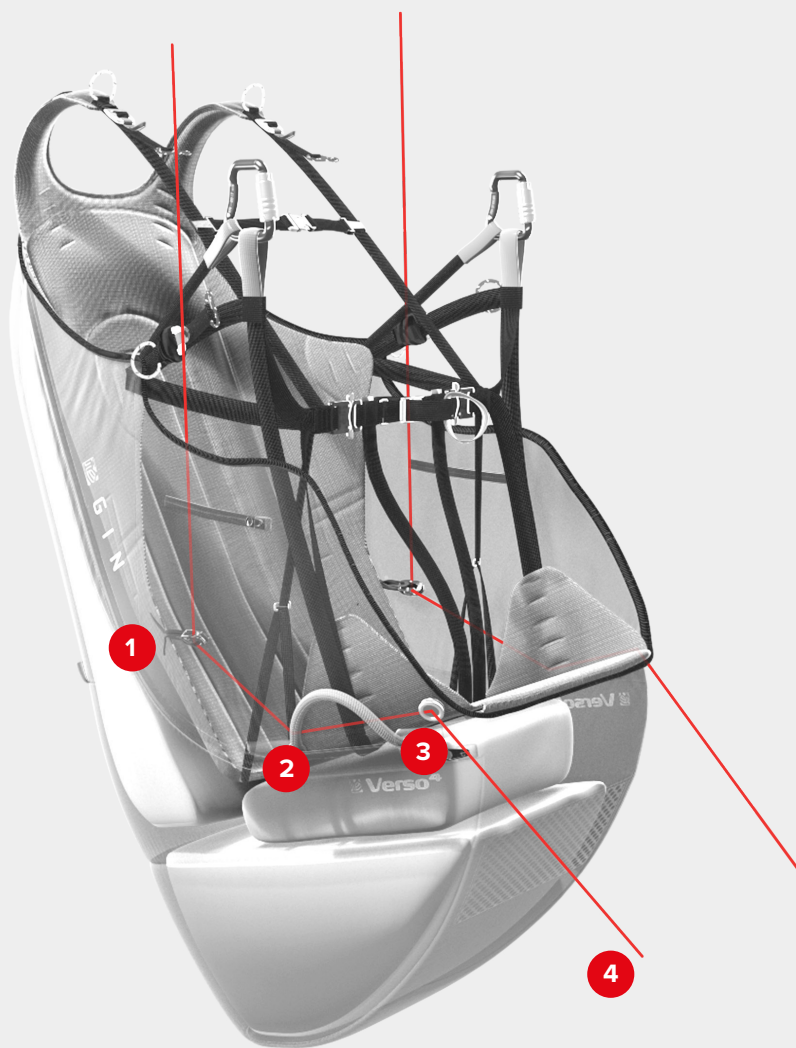

INSTALLING THE SEAT PLATE

The seat plate is removable and can be accessed by a panel at the rear of the seat. Simply remove by separating the leg straps and pulling it out backwards. When installing the seat plate be sure to loop the leg straps over the back edge of the seat. The seat plate should be installed with the wider side to the back and the narrow side at the front where the knees of the pilot will rest. When installing check that the leg straps are positioned at the back center of the seat plate pocket.

! WARNING: Forgetting to loop the leg straps behind the seat plate may place the pilot at risk of falling out of the harness.

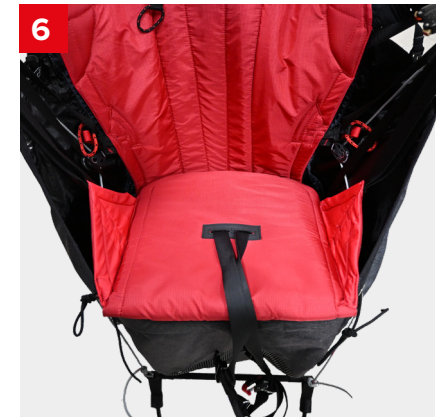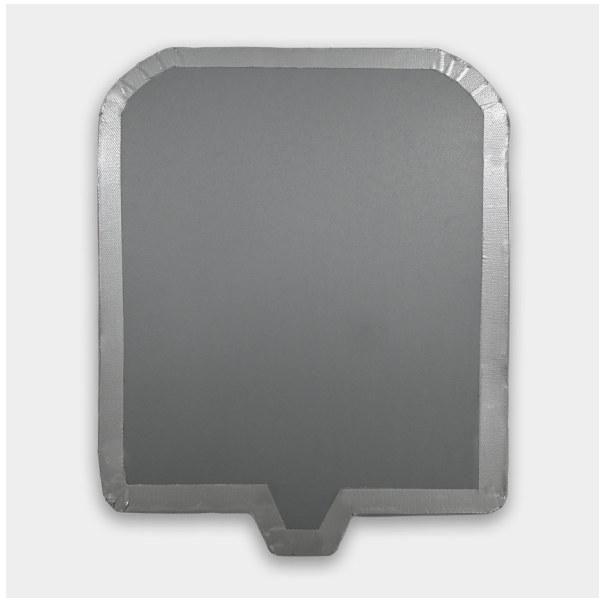

CONNECTING THE RISER CARABINER

The riser carabiner connection has 2 harness straps that must be attached, however the 2 webbings are connected together for convenience. Follow the image to the RIGHT to properly connect the riser carabiner to the harness webbing. The RIGHT side of harness has BLUE webbing connection, the LEFT side of the harness has a RED webbing connection to match GIN Glider risers for a safe and easy connection.

QUICK-OUT Carabiners are not compatible with the Verso 4.



! WARNING: Make sure the automatic gate is fully closed before the take off. The closing of the carabiner should be checked before every flight.

! CAUTION: Automatic aluminium carabiners have a limited lifetime due to metal fatigue. They must be replaced after 5 years or 500 flight hours, whichever is soonest. They should never be used between spreaders and tandem wing risers as main carabiners. They should also never be used to connect bridles to the reserve.

AIRBAG PROTECTION

The advantage of the airbag back protection is the increased safety rating compared to other technologies. Also the packing volume is reduced and the harness is lighter compared to a conventional foam protector.

The airbag inlet is located between the legs of the pilot just below the seat plate. On takeoff the harness will be mostly inflated before the pilot is airborne thanks to the designed pre-inflation which is aided by Titanium wire a thin foam layer. After takeoff the harness is normally fully inflated in a matter of seconds.


In the event of an incident the inflated back protection will help to dissipate the force of the impact. However, the back protection cannot completely eliminate the risk of injury to the pilot.

! WARNING: The back protection does not eliminate the chance of injury as a result of a crash.

! WARNING: If the harness is subjected to temperatures exceeding 70 degrees Celsius the integrity of the back protection may be compromised.

! WARNING: After any strong impact the back protection should be professional inspected for external or internal damage. Any damage can decrease the effectiveness of the back protection.

i NOTICE: The back protection is EN / LTF certified.

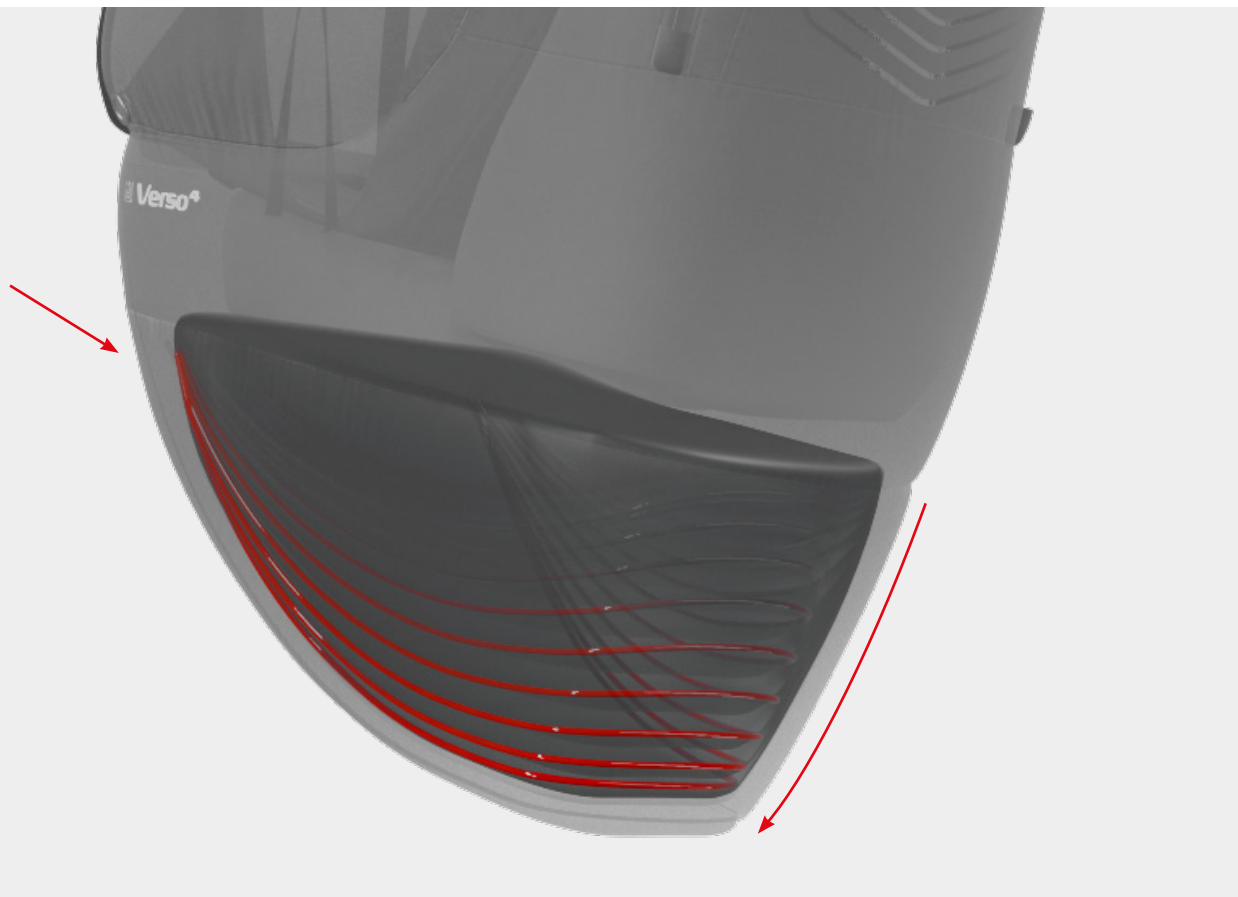

RESCUE INSTALLATION AND COMPATIBILITY CHECK

Gin Gliders recommend that rescue installation is performed properly by a competent person. The rescue parachute is a pilot's last resort and failure to pack or connect the reserve parachute in the correct way may cause death or severe injury. The pilot is responsible for ensuring proper installation.

This harness is compatible with the **G-Lite 2, Yeti UL, Yeti Cross 2 and Yeti** rescue parachutes. Other manufacturers' rescues may also be used but we cannot guarantee their function. The pilot is responsible for checking compatibility.

Every first installation of a rescue system into the harness (that means every new combination of harness and rescue system) must be checked by a qualified paragliding professional for compatibility. To verify the installation, you must perform a test deployment by sitting in a simulator.

Rescue parachutes should be repacked at least every 150 days; so installing your rescue in a new harness may also provide a good opportunity for a repack. After every repack of the rescue parachute you should also do a compatibility check.

RESCUE COMPATIBILITY

MAKE SURE THAT THE RESCUE PARACHUTE CAN BE RELEASED FROM THE RESCUE CONTAINER—*it must be done by you, the pilot, sitting in the harness hanging from a simulator.*



! WARNING: If you are in any doubt about any aspect of rescue installation, seek professional advice!

i IMPORTANT: You must perform a test deployment from a simulator to verify the installation.

THE RESCUE DEPLOYMENT BAG AND THE HARNESS DEPLOYMENT HANDLE

The rescue container for this harness comes with its own deployment handle. This handle and its strap must be connected to the deployment bag of the parachute. In particular, check the length of the strap connecting the rescue deployment handle to the rescue inner container. It should be long enough that the reserve can be extracted without the danger of the pins not being pulled before the strap tightens on the reserve, but not so long that there is excessive slack that extends the movement required for deployment.

The deployment bag of other manufacturers' rescue systems (i.e. non-GIN rescue systems) may have different loop positions which may cause a deployment failure. Be sure to contact your dealer or a qualified professional to check the connection, position and secure deployment, and refer to the rescue manual for details.

The rescue handle and inner container supplied with the Verso 4 should already be connected.



Verso 4

INNER BAG

i IMPORTANT: The deployment bag of other manufacturers' rescue systems may have different loop positions which may cause a deployment failure.

1



Handle attachment

2



Pass the handle through the center loop

3



Pass the handle through itself

4



Pull to make a clean, tight knot

RESCUE INNER BAG PACKING

Your rescue should be repacked into the supplied inner containers as follows.



1 Place the folded rescue into the inner bag



2 Use a central elastic band to pass through the left eyelet hole



3 Use a central elastic band to pass through the top eyelet hole



4 Secure the suspension line using the elastic band



5 Cover the top cover, and arrange the line



6 Cover the bottom cover, and use a central elastic band to pass through the bottom eyelet hole



7 Secure the suspension line using the elastic band

CONNECTING THE RESCUE BRIDLE

To connect a rescue to your harness we recommend using a GIN Rescue Carabiner. If you choose to use different type of connector, it should be rated at least 9 times the maximum weight. For example, our recommended 7mm Stainless Steel screw-gate maillon (square) connector has a minimum breaking load of **28kN (2855 Kgf)**. It is the pilot's responsibility to check the compatibility of the rescue system and ensure that it is installed properly.

Be sure to inspect your connector during normal maintenance and safety checks. Replace it whenever there are any signs of wear and check your rescue system with a professional after any deployment. We recommend that you cover the connection using the Maillon rapid neoprene cover to prevent excess friction. Rubber-bands could also be used to secure the attachment and prevent excess friction.

RECOMMENDED BY GIN: 7MM SQUARE STAINLESS SCREW-GATE MAILLON
BREAKING LOAD: >28KN

! WARNING: When connecting the rescue bridle be sure to secure the connection using maillon neoprene cover, rubber bands or heat shrink wrap. If the bridles are not secure they may burn or cut from excess friction.

i IMPORTANT: Be sure to connect both rescue bridles to the rescue.

i NOTE: If you don't want to use carabiner connection, you can connect through a larkshead knot like below picture.



MAILLON CONNECTION *(Recommended by Gin Gliders)*

1



2



3



4



RESCUE INSTALLATION GUIDE

It is very important to properly install the rescue parachute. If the parachute is not folded correctly or the lines are not placed properly then a serious if not fatal accident could result. If you have any doubts speak with your instructor or GIN dealer.

RESCUE INSTALLATION GUIDE

Begin by first connecting the Y bridle and the rescue handle to the rescue parachute. Install the rescue into the harness with the handle connection **FACING UP** and the extra para line neatly folded on the bottom of the container. Be sure that the inner bag is installed so the rescue handle loop is facing the opening of the rescue container.

Using parashord install your rescue into the harness in the order shown and on the next page:

RESCUE COMPARTMENT VOLUMES

Size	XS	S	M	L	XL
Rescue container volume (cm3)	4700	4700	5000	5200	5400

1 **WARNING:** When installing the reserve make sure the reserve handle is up and the reserve lines are facing down.

1 **CAUTION:** Check the zipper of the rescue bridle cover after any hard landing or dragging at takeoff, as it may have opened.



RESCUE INSTALLATION GUIDE




1 After connecting the rescue to rescue bridle, insert rescue with handle facing UP



2 Attach the Velcro of the handle and place both ends in each pocket. Move zipper to the shown position and pass the parachord through the closing loops.



3 Do up the zipper to the maximum closed position (behind the shoulders)

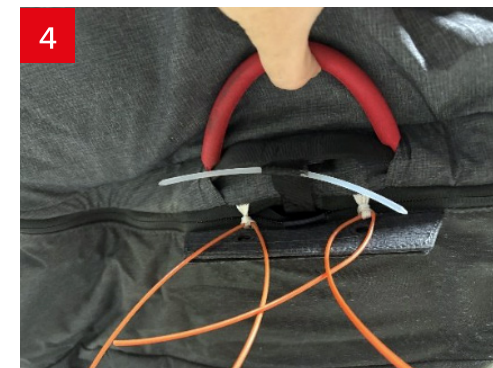

4 Pass the wire through the closing loops



5 Pass the handle wires through the each hole on your bottom side



6 Pull the wire as hard as you can, and let the handle's plastic bar through the space created



7 Remove the wire



8 Attach the Velcro each side and you complete to equip a rescue

RESCUE BRIDLE TUNNEL

There are 2 attachment points for reserve parachutes on the verso 4 are located near the upper shoulder connection point, between the back pocket and the harness.

The verso 4 uses zipper bridle tunnels for the rescue bridles. The zipper bridle tunnel offers superior opening and reduced drag in flight. When using a zipper bridle tunnel it is very important to run the zipper closure ALL the way from END-to-END to prevent damage to the harness or opening failure during rescue deployment.

RESCUE BRIDLE

The main rescue bridle and rescue bridle tunnel is located just behind the harness shoulder connection point. The rescue bridles are connected using a “figure 8” knot and can be replaced if damaged.



i IMPORTANT: The rescue bridle tunnel zipper must be closed from end-to-end.

STORAGE

BACK POCKET (1)

The back pocket is designed to store the pilots rucksack and other light accessories during flight.

SIDE POCKETS (2)

Located on both sides of the harness, just under the carabiners, are two pockets that can be used to store small items such as a snack or small digital camera during your flight. The right side pocket has a zipper for closing and securing important items while the left side is closed by elastic fabric for easy access in flight.

SHOULDER STRAPS (3)


For better aerodynamics the shoulder straps are covered with fabric and there is no pocket there, you may use the side pockets to store all the small items.

OPTIONAL RADIO POCKET (4)

The radio pocket attaches to either shoulder strap and comes equipped with a hook knife.

G-CHUTE POCKET (5)

The G-chute pocket is located on the left side of the harness inside the pocket there is a loop to connect the G-Chute. See the G-Chute manual for instructions on use.

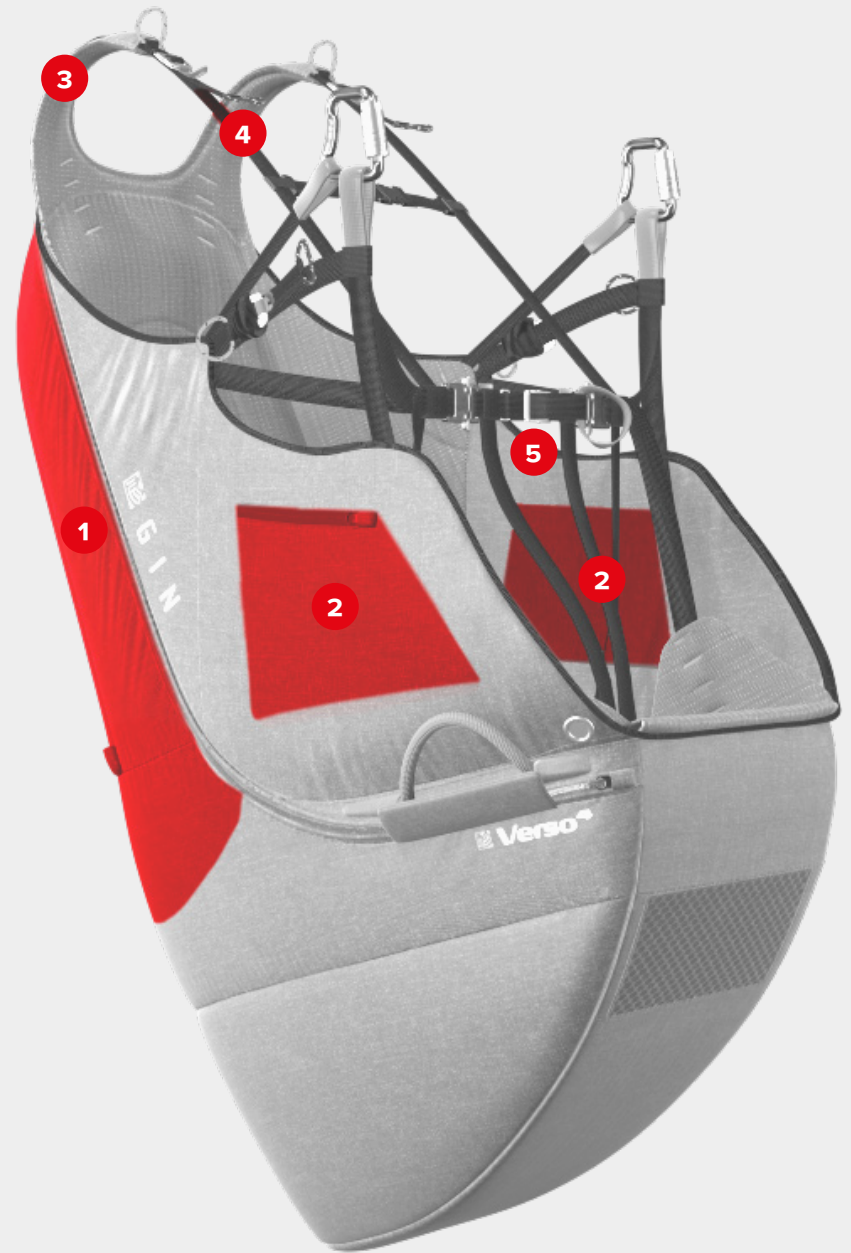

ADJUSTMENTS

After choosing a harness that is close to your body size, adjust your harness to suit your physique and flying style. It is important to adjust it correctly to ensure you can easily slide into the sitting position after take off. A poorly adjusted harness can adversely affect the flying characteristics of your paraglider.

Perform adjustments before your first flight by hanging in a simulator and fine-tune the settings if necessary during your first few flights.

SHOULDER STRAPS

The optimum setting for the shoulder straps depends on the height of the pilot. Step into the harness and stand upright with the breast strap closed, symmetrically adjust the shoulder straps until they are a snug fit, but not tight.


Tighten: pull down on the black and green loop.

Loosen: pull up on the BLACK loop on the top of the shoulder strap.

CHEST STRAP

The Chest strap can be adjusted while in flight to match the flying condition and pilots flying style. Wide: the pilot will feel more feedback from the glider and will have more body weight control.

NOTE: Make sure that the rescue system has been installed before making adjustments.

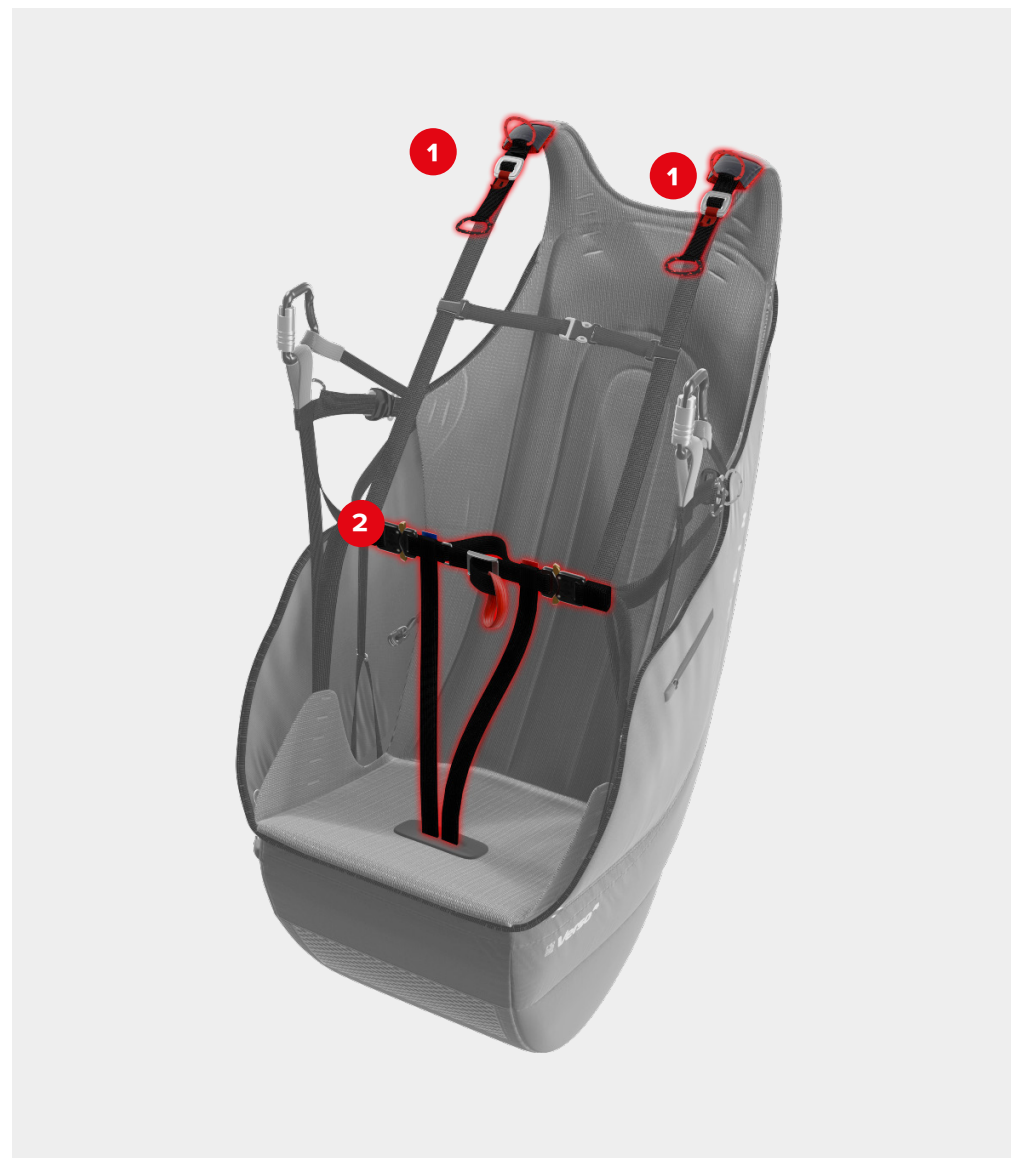


LATERAL STRAPS (1)

The lateral straps adjust the angle between the thighs and the back. Lengthening the straps increases the angle and vice-versa. The easiest way to adjust them correctly is during a flight in calm air. Remember that flying in the supine position (i.e. leaning back), reduces the stability of the harness and increases the risk of riser twists after a deflation.

To tighten, pull forward on the black/red loop. To loosen, pull backwards on the red/black loop.

SPEED BAR (2)

Hanging in the simulator, adjust the length of the speed bar chord so that the bar hangs at least 15cm below the front of the harness. Making the chord too short could result in the speed system being constantly or unintentionally engaged during flight. It is safer to start with the speed bar a little long and shorten it following your first flights. Test the speed bar in flight only after you are comfortable with your new harness, and always do so in calm conditions with enough clearance above the ground.

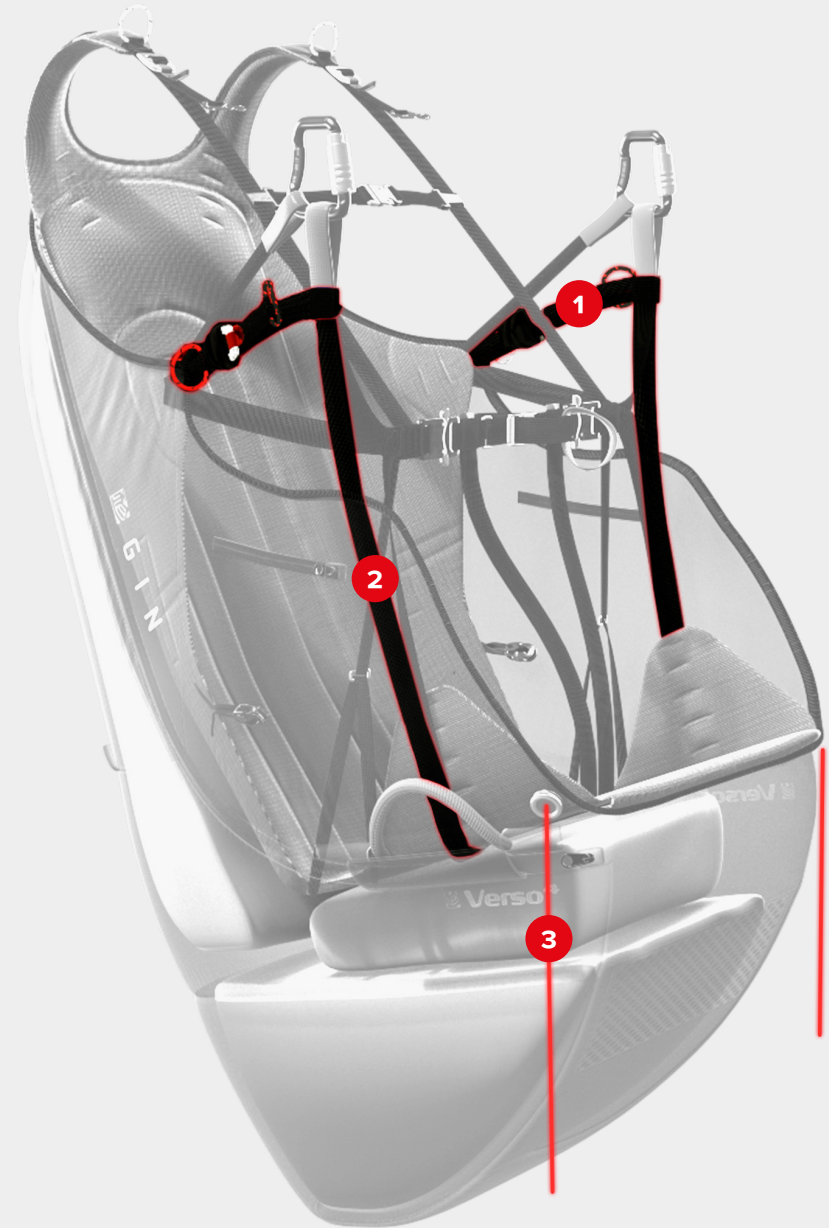

RUCKSACK

Place all the harness webbings and straps between the seat plate and back plate when you turn the harness into the rucksack. Ensure the lateral straps are folded inwards to maintain the shape and ergonomics of the rucksack.

Place the packed wing into the rucksack and close the zipper and compress the bag as required with the compression straps.

The rucksack could be detached through a zipper which is connecting the rucksack to the harness.



DEATCHING THE RUCKSACK

To deatch the backpack from the harness, use the two side zippers that keep the two elements connected. Whenever you're using the Verso 4 backpack, we recommend keeping this connection zipper connected, as it will help manage the load and position the harness correctly in the backpack.

One of the great advantages of being able to disconnect the backpack is that it makes it easier to repair and also allows you to replace it if the damage is beyond repair, ensuring a longer product life.



Open the back pocket



Open the 2 large size zippers



Make sure both sides zippers are fully released



Close again the zipper to use it as a independent backpack

FLYING WITH THE **VERSO 4**

GENERAL WARNINGS AND ADVICE

Before every flight, check the following:

- ⊙ Are you in good physical and mental condition?
- ⊙ Are you familiar and compliant with all applicable laws and regulations in your area?
- ⊙ Are you within the certified weight range of your paraglider?
- ⊙ Do you have the necessary valid insurance cover (e.g. liability, medical, life)?
- ⊙ Are you briefed thoroughly about the site, airspace and expected weather conditions of the day?
- ⊙ Is your equipment and choice of site suitable for your level of experience?
- ⊙ Do you have a suitable helmet, gloves, boots, eye-wear and adequate clothing?
- ⊙ Are you carrying some form of identification, so that people know who you are in case of an accident?

Take along a radio and mobile phone if possible.

- ⊙ Do you fully understand how to safely use your new equipment? If not, have your instructor or dealer explain anything you are not sure about.

When you go for your first flight on your new harness, be sure to pick a day and site that does not present you with any unfamiliar challenges. During your first flight, familiarize yourself with the in-flight characteristics of your new harness.

Pre-flight checks

As part of your normal pre-flight check routine, check:

- ⊙ Is there any damage to the harness or carabiners that could affect its airworthiness?
- ⊙ Is the rescue parachute container closed correctly with the pins in the right position?
- ⊙ Is the deployment handle correctly inserted or attached?
- ⊙ Are all buckles, belts, zips securely fastened? Buckles should click into place as you close them, and a gentle pull on the fastened buckle verifies this. Secure any zips after fastening the buckles. Take extra care in snowy or sandy environments.
- ⊙ Is the paraglider connected correctly to the harness with both carabiners secured by their locking mechanisms?
- ⊙ Is the speed bar attached correctly to the glider?
- ⊙ Are all pockets closed properly and any loose items tied down safely?
- ⊙ Is the air chamber intake open and clear?
- ⊙ Have you closed your leg and chest straps? Double check before you take off!



i IMPORTANT: Use a complete and consistent system of pre-flight checks and repeat the same sequence every flight.

i IMPORTANT: The maximum clip in weight of the Verso 4 is 120kg, we do not recommend you fly with more than this weight.

Rescue Deployment

In the event of an emergency, you must quickly evaluate your height and the seriousness of the incident. A seconds hesitation in deploying the reserve could prove fatal if there is insufficient height. On the other hand, deploying the rescue when the glider is recoverable may result in needless injury.

If you decide to deploy the rescue:

- 1) Look for the rescue handle and grasp it firmly with one hand
- 2) Pull forwards and upwards on the handle to release the deployment bag from the rescue container.
- 3) Look for a clear area, and in a continuous motion, throw (and RELEASE!) The rescue away from yourself and the glider, preferably into the air stream or against the direction of spin. After deployment, avoid entanglement and pendulum motions by promptly pulling in the glider as symmetrically as possible with the B, C, D or brake lines.
- 4) On landing take an upright body position and be prepared to do a PLF (Parachute Landing Fall) to minimize the risk of injury.

Landing with the Verso 4

Before landing, slide your legs forward in the harness so that you adopt the standing position. NEVER land in the seated position—it is very dangerous even if you have back protection. Standing up before landing is an active safety precaution.



i IMPORTANT: In normal flight, periodically feel the position of the rescue handle so that the action of reaching for the rescue handle is instinctive in an emergency.

! WARNING: During any incident in flight, always monitor your altitude. If you have any doubt that you have sufficient height for recovery, deploy your reserve without hesitation. "If in doubt, get it out!".

NOTE: After any rescue deployment, it is essential to have your harness thoroughly inspected by a qualified professional to be sure there is no damage to the rescue connection points, rescue bridle or any other parts.



TOWING

The Verso 4 can be used for towed launches. The Gin Towing Bridle can be hooked directly to the main carabiners. For further details, refer to the documentation provided with your tow release, or ask a qualified towing instructor at your flying site.



TANDEM FLYING

The Verso 4 is not designed for tandem flying. See www.gingliders.com for details of our harnesses specifically designed for tandem flying.



FLYING OVER WATER

Water landings should be avoided at all costs, as the back protection increases the risk of the pilot floating in a head-down position. For safety training over water, we recommend wearing a proper flotation vest with a head support holding the wearer's head above the surface even when unconscious. Don't land in the water with the cocoon zipper closed.

MAINTENANCE AND REPAIRS

The materials used in this harness have been carefully selected for maximum durability. Nevertheless, keep your harness clean and airworthy to ensure the longest possible period of safe operation.

Care and maintenance

Don't drag your harness over rough or rocky ground. Avoid unnecessary exposure to UV rays, heat and humidity. Keep the folded harness in your rucksack when not in use.

Store all your equipment in a cool, dry place, and never put it away while damp or wet. Regularly clean off dirt with a plastic bristled brush and/or a damp cloth. If the harness gets exceptionally dirty, wash it with water. Make sure you first remove the entire sub-components for example, rescue parachute etc. Allow the harness to dry naturally in a well ventilated area away from direct sunlight. If your rescue parachute ever gets wet (e.g. in a water landing) you must separate it from the harness, dry it and repack it before putting it back in its separate deployment bag.

After a hard landing you must check your harness and back protector for damage, pay close attention to the rescue container and verify all of the attachments are secure.

INSPECTION CHECKLIST

The pilot should perform the following inspection on every repack of the rescue and should be checked by a professional after 24 months or 200 hours of flying, whichever comes first. Additional inspections should be performed after any crash, bad landing or take off, or if there are any signs of damage or undue wear. Always seek professional advice whenever in doubt.



! IMPORTANT: Any repairs should only be carried out by the manufacturer or by an approved agent. This will ensure that the correct materials and repair techniques are used.

! IMPORTANT: No harness should ever be flown if there is any kind of damage to the webbing.

The following checks should be carried out:

- ⊙ Check all webbing, straps and buckles for wear and damage (ex. open seams, tearing or cutting), especially the areas that are not easily seen, such as the inside of the carabiner hook-in points.
- ⊙ All sewing must be intact and any anomalies attended to immediately to avoid exacerbation of the problem.
- ⊙ Special attention should be paid to the rescue installation, particularly the elastic and Velcro parts.
- ⊙ The main carabiners must be replaced at least every 5 years or after 500 hours, whatever comes first. Impacts may create undetectable cracks that could result in structural failure under continuous load.
- ⊙ A careful visual inspection of the protector should be made, airbags should be filled with air and checked for leaks, mousbag should be inspected for tears and foam recovery.

REPAIRS

The manufacturer or an official GIN dealer should carry out any repair that involves critical parts of the harness. This will ensure that the correct materials and repair techniques are used.

A sticky repair fabric is available that you can order to fix small tears to the outershell

Storage

Store at a temperature between 10° and 25° C and in relative humidity between 50 and 75%. Make sure that the harness is not stored in a place where animals such as mice or cats could use it as a place to sleep.

Do not store the harness near any chemicals (including water). Petrol, for example, causes the material to disintegrate and can cause considerable damage to your harness. When your equipment is in the car boot, keep it as far away as possible from any spare petrol cans or oil containers.

The harness should not be exposed to extreme heat. High temperatures accelerate the process of hydrolysis, particularly when combined with moisture, which damages fibers and coating. Do not store your harness near radiators or other heat sources.



GIN quality and service

We take pride in the quality of our products and are committed to putting right any problems affecting the safety or function of your equipment and which are attributable to manufacturing faults. Your GIN dealer is your first point of contact if you have any problems with your equipment.

If you are unable to contact your dealer or GIN importer, contact Gin Gliders directly via our website.

GIN lifetime guarantee

Gin Gliders are proud to guarantee the quality, craftsmanship and performance of all our products. Equipment with defects in materials or manufacturing will be repaired or replaced at the discretion of Gin Gliders for the practical lifetime of the product. Equipment damaged through wear and tear, misuse or neglect may be repaired at a nominal charge.

If you have any problems with your equipment, please contact your GIN dealer in the first instance, or Gin Gliders directly via our website.

Care of the environment

We are privileged to fly in areas of outstanding natural beauty. Respect and preserve nature by minimizing your impact on the environment. When visiting an area, contact the local club for details of environmentally sensitive areas and local restrictions.

Gin Gliders gives consideration to the entire life cycle of its harnesses, the last stage of which is recycling in an environmentally-friendly manner. The synthetic materials used in a harness must be disposed of properly. If you are not able to arrange appropriate disposal, Gin Gliders will be happy to recycle the harness for you. Send the harness with a short note to this effect to Gin Gliders Inc.

Product registration

Register this product to receive any important safety updates.

www.gingliders.com/register



FINAL WORDS...

Most of us today live in a dependent society where we are regulated and protected. There are few opportunities for individuals to develop the self-responsibility that is the foundation of safety in extreme sports such as paragliding.

Most accidents are caused by getting into situations that are too demanding for your level of experience. This happens if you lack fundamental understanding, are incapable of assessing the risk or simply do not pay sufficient attention to your surroundings or your own state of mind.

To stay safe, the best you can do is to increase your understanding, skill and experience at a rate you can manage safely. There is no substitute for self-responsibility and good judgment.

In the end, paragliding offers a unique opportunity to learn to take control of your own destiny.
Memento mori, carpe diem!

Fly safely, and...**ENJOY!**
GIN team



G I N

TECHNICAL DATA

Size	XS	S	M	L	XL
Carabiner distance (cm)	44~48	44~48	46~50	48~52	50~54

CERTIFICATION

The Verso 4 is **EN** certified, max load 100daN
Certification number: **PH_484.2025** | **CE** certification

MATERIALS

HARNESS FABRIC	210D T/Tone BABY R/S RED
Outer	HRNC NP 70D HEATHER R/S 2X2 PD WR(C0) PU20D, NFD BABY R/S (vol.11#63) Dark Grey
Inner	Oxford 210D 60” Black, MJ29 R/S MF 65” Black
WEBBING	Nylon HD 210Nylon 10mm/15mm/20mm
	Polyester 22mm/28mm
THREAD	P/F 280D/3 bonded Black , P/F 280D/3 bonded Red , P/F 280D/3 bonded Dark Grey , P/F 420D/3 bonded Black N/F 210D/9 bonded Black, N/F 210D/9 bonded Red

PILOT DETAILS / PROOF OF OWNERSHIP

1. OWNER

Name:

Address:

Phone:

Email:

2. OWNER

Name:

Address:

Phone:

Email:

3. OWNER

Name:

Address:

Phone:

Email:

HARNESS DETAILS


Size	Colour	Serial Number
Check flight (date)		
Mark and signature		

INSPECTIONS AND REPAIRS OVERVIEW

Date	Work carried out	General conditions on delivery	Completed by (name)	Stamp and signature

HARNESS DIAGRAM

- 1** Integrated airbag
With improved pre-inflation
- 2** Rescue container
- 3** Rescue handle
& Inner container
- 4** Austrialpin Cobra Buckle
- 5** 30mm aluminium carabiner
- 6** Shoulder straps
- 7** Shoulder straps trimmer
- 8** Lumbar trimmer
- 9** Zippered side pocket
- 10** Speedbar Harken Pulley
- 11** Back pocket

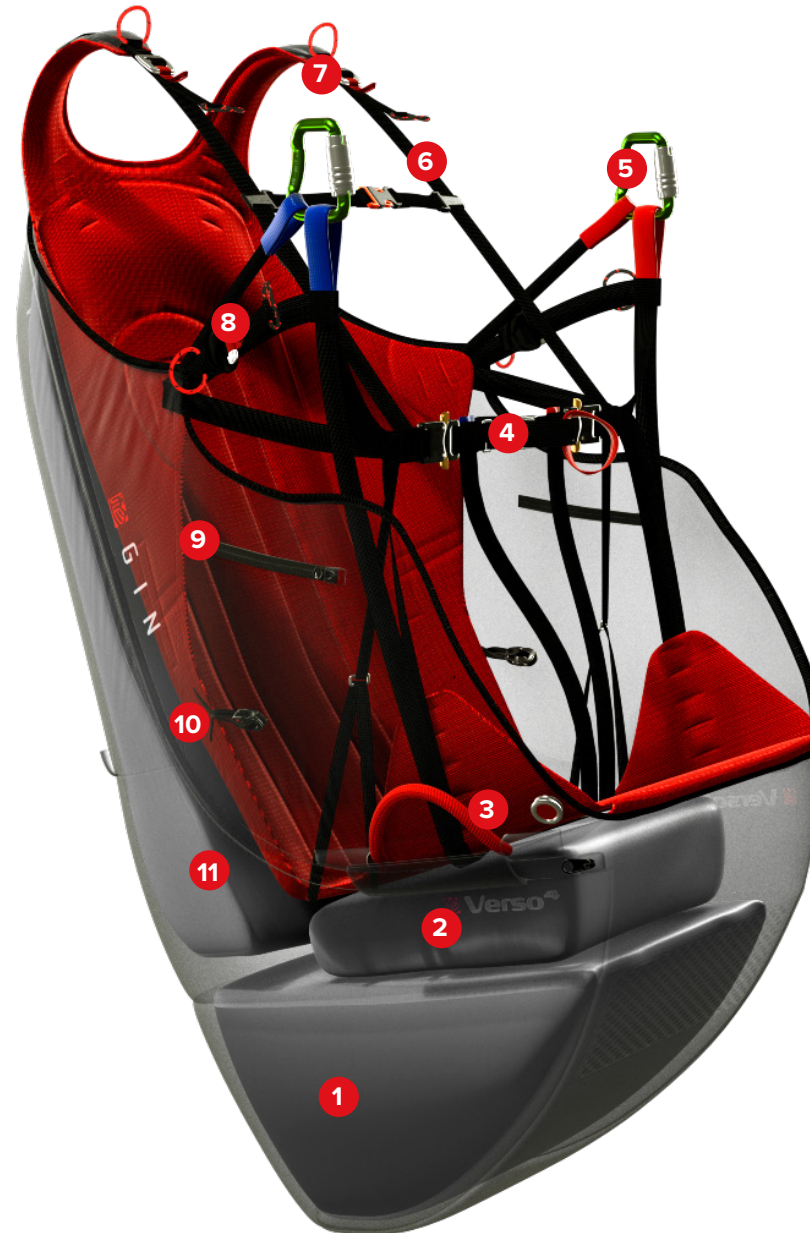

RUCKSACK DIAGRAM

- 1** Adjustable shoulders straps
- 2** Water bottle pocket
- 3** Waist straps
- 4** Stretchable side pocket
- 5** Hiking pole holder
- 6** Grab handle
- 7** Roll-top system





Gin Gliders

2318-32, Baegok-daero,
Mohyeon-myeon, Cheoin-Gu,
Yongin-city, Gyeonggi-Do,
17036 Korea

www.gingliders.com