

 ***Camino²***


Contents

1. Colour
2. Technical Specifications
3. Riser
4. Line Plan
5. Line Length
6. Materials






1.Colour

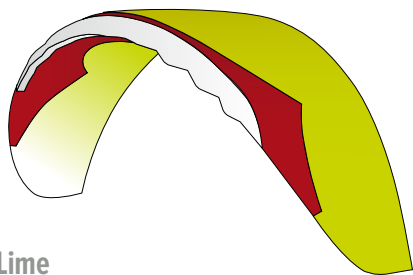

Lime

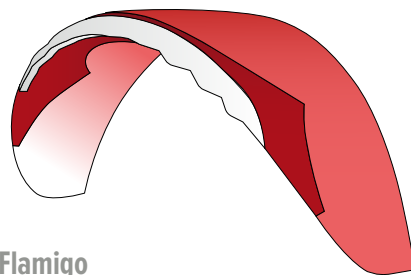


Flamigo

2. Technical Specifications


SIZE		XXS	XS	S	M	L
FLAT	AREA	19.53m ²	21.20m ²	23.00m ²	24.90m ²	26.90m ²
	SPAN	11.09m	11.56m	12.04m	12.53m	13.02m
	A.R.	6.3	6.3	6.3	6.3	6.3
PROJECTED	AREA	16.58m ²	17.99m ²	19.52m ²	21.13m ²	22.83m ²
	SPAN	8.93m	9.31m	9.69m	10.09m	10.48m
	A.R.	4.81	4.81	4.81	4.81	4.81
CELL NUMBER		65	65	65	65	65
GLIDER WEIGHT		3.09kg	3.34kg	3.60kg	3.96kg	4.15kg
WEIGHT IN FLIGHT		60-75kg	75-90kg	85-100kg	95-110kg	105-125kg
IDEAL WEIGHT RANGE		63-73kg	78-88kg	88-98kg	98-108kg	110-123kg
EN / LTF		C	C	C	C	C



3. Risers

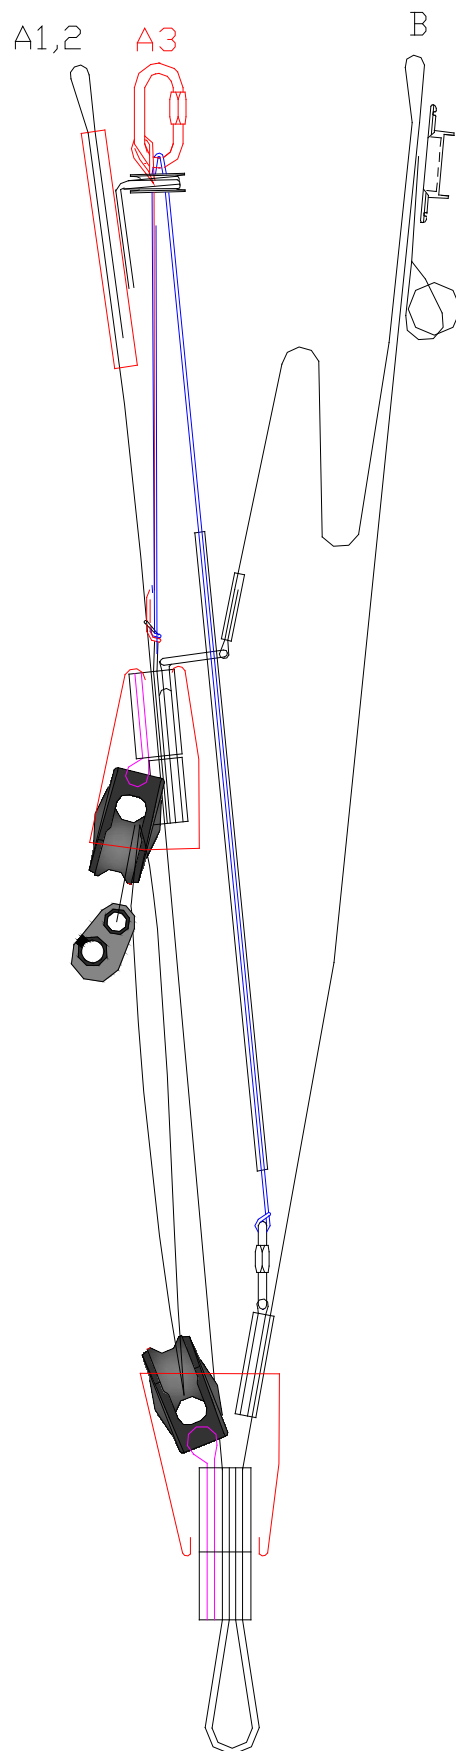

4. Line Plan

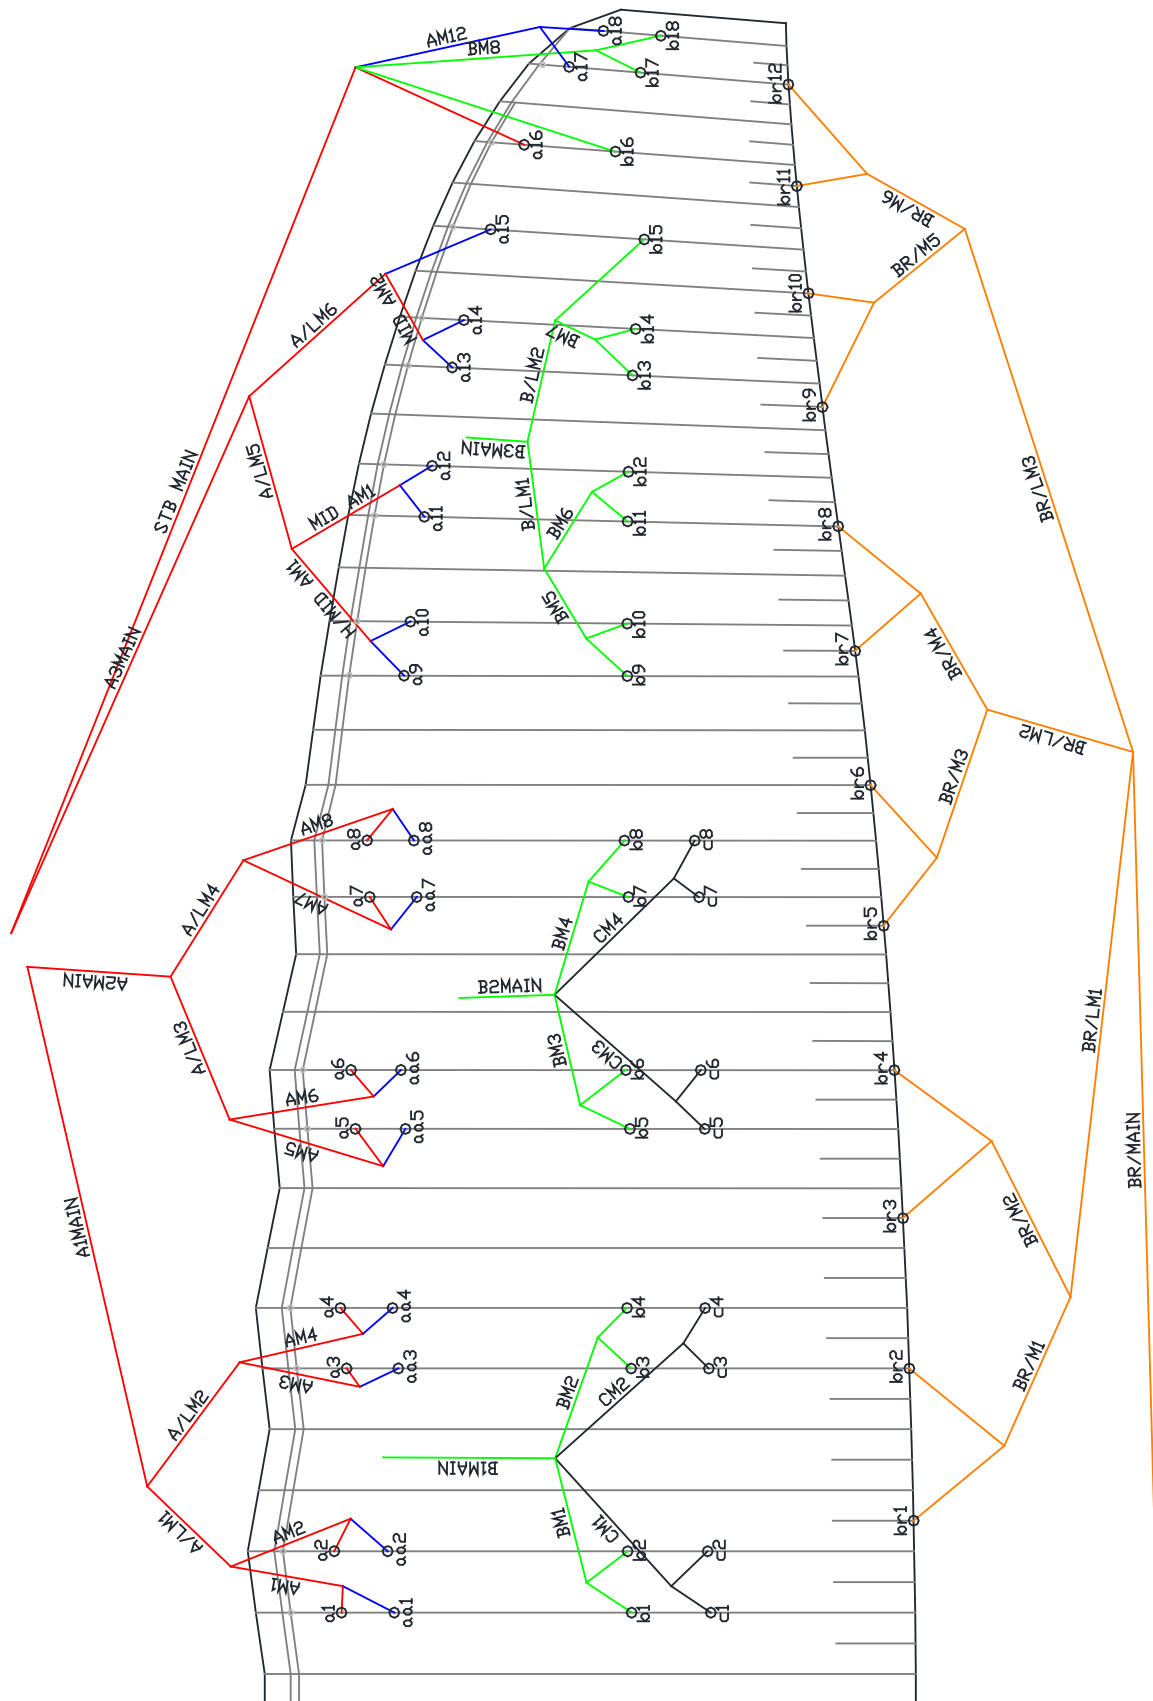

5. Line Length [Camino2 XXS]

Upper (5kg)													
	a		aa		b		c		br				
1	360	2-8001-090	325	2-8001-090	420	2-8001-050	430	2-8001-050	700	2-8001-050			
2	365	2-8001-070	325	2-8001-070	375		385		495				
3	455		425		395		405		655				
4	360		325		410		420		625				
5	330	2-8001-090	300	2-8001-090	400		410		660				
6	340	2-8001-070	305	2-8001-070	350		360		490				
7	340		310		375		385		500				
8	385		355		380		380		560				
9	350	2-8001-050			340				520				
10	300				280				440				
11	315				315				345				
12	310				305				470				
13	305				305								
14	275				275								
15	815				810								
16	995				980								
17	230				240								
18	220				245								
H/MID (5kg)													
	A				B		C		BR				
1	640	2-8001-130			1355	2-8001-070	1395	2-8001-050	1115	2-8001-050			
2	595				1295		1335		780				
3	490				1330		1365		795				
4	605				1250		1285		720				
5	645	2-8001-090			830				530				
6	590				710		630						
7	570				540								
8	525			675	2-8001-050								
9	880	2-8001-070											
10	790												
11	540												
12	675	2-8001-050											
L/MID (5kg)													
	A				B				BR				
1	950	2-8001-190			1165	2-8001-070			2260	2-8001-070			
2	920				1270				2075				
3	920								2215				
4	875												
5	1170	2-8001-130											
6	1355												
MAIN (5kg)													
	A				B		B		BR				
1	4475	2-8001-340			4650	2-8001-230			1655	2-8001-090			
2	4415	-10kg			4570				1400+300	TGL220			
3	3750	2-8001-230			3805	2-8001-130							
STB MAIN					4720	2-8001-090							



5. Line Length [Camino2 X5]

Upper (5kg)													
	a		aa		b		c		br				
1	370	2-8001-090	335	2-8001-090	435	2-8001-050	450	2-8001-050	735	2-8001-050			
2	370	2-8001-070	330	2-8001-070	390		400		525				
3	410		375		410		420		685				
4	375		335		425		435		655				
5	345	2-8001-090	310	2-8001-090	420		430		690				
6	355	2-8001-070	315	2-8001-070	365		380		515				
7	350		320		390		400		520				
8	410		375		395		400		580				
9	370	2-8001-050			360						545		
10	315				295						460		
11	335				335						365		
12	330				325						495		
13	320				315								
14	285				285								
15	845				840								
16	1035				1020								
17	240				250								
18	230				255								
H/MID (5kg)													
	A				B		C		BR				
1	670	2-8001-130			1415	2-8001-070	1455	2-8001-050	1160	2-8001-050			
2	630				1355		1395		815				
3	575				1385		1420		825				
4	630				1305		1340		755				
5	670	2-8001-090			860	2-8001-050			555				
6	615				735				655				
7	595				560								
8	540				700								
9	915	2-8001-070											
10	820												
11	560												
12	700	2-8001-050											
L/MID (5kg)													
	A				B				BR				
1	990	2-8001-190			1210	2-8001-070			2350	2-8001-070			
2	960				1320				2165				
3	960								2310				
4	910												
5	1220	2-8001-130											
6	1415												
MAIN (5kg)													
	A				B		B		BR				
1	4685	2-8001-340			4860	2-8001-230			1800	2-8001-090			
2	4625	-10kg			4780				1400+300	TGL220			
3	3930	2-8001-230			3990	2-8001-130							
STB MAIN					4945	2-8001-090							

5. Line Length [Camino2 S]

Upper (5kg)													
	a		aa		b		c		br				
1	385	2-8001-090	345	2-8001-090	455	2-8001-050	465	2-8001-050	760	2-8001-050			
2	385	2-8001-070	340	2-8001-070	405		415		540				
3	375		340		425		435		710				
4	400		360		445		455		680				
5	360	2-8001-090	325	2-8001-090	435		445		715				
6	365	2-8001-070	325	2-8001-070	385		390		535				
7	360		330		405		420		540				
8	425		395		410		415		605				
9	380	2-8001-050			370				565				
10	330				305				480				
11	345				345				375				
12	340				335				510				
13	330				330								
14	300				300								
15	885				880								
16	1080				1060								
17	250				260								
18	240				265								
H/MID (5kg)													
	A				B		C		BR				
1	700	2-8001-130			1470	2-8001-070	1295	2-8001-050	1210	2-8001-050			
2	660				1410		1230		850				
3	655				1440		1255		860				
4	650				1360		1175		785				
5	700	2-8001-090			900				575				
6	645				770				685				
7	625				585								
8	560	2-8001-070			730	2-8001-050							
9	955												
10	855												
11	585	2-8001-050											
12	730												
L/MID (5kg)													
	A				B				BR				
1	1030	2-8001-190			1260	2-8001-070			2445	2-8001-070			
2	1000				1375				2255				
3	1000								2410				
4	950												
5	1270	2-8001-130											
6	1470												
MAIN (5kg)													
	A				B		B		BR				
1	4900	2-8001-340			5085	2-8001-230			1955	2-8001-090			
2	4840	-10kg			5005				1400+300	TGL220			
3	4120	2-8001-230			4180	2-8001-130							
STB MAIN					5175	2-8001-090							



5. Line Length [Camino2 M]

Upper (5kg)													
	a		aa		b		c		br				
1	400	2-8001-090	360	2-8001-090	475	2-8001-050	485	2-8001-050	790	2-8001-050			
2	400	2-8001-070	355	2-8001-070	425		430		565				
3	390		350		440		450		735				
4	415		370		460		470		705				
5	370	2-8001-090	335	2-8001-090	455		465		745				
6	385	2-8001-070	340	2-8001-070	400		410		560				
7	375		345		415		435		570				
8	440		405		425		435		635				
9	395	2-8001-050			390				585				
10	335				320				495				
11	355				355				385				
12	350				345				530				
13	345				345								
14	310				310								
15	915				915								
16	1125				1110								
17	255				270								
18	250				275								
H/MID (5kg)													
	A				B		C		BR				
1	730	2-8001-130			1530	2-8001-070	1580	2-8001-050	1260	2-8001-050			
2	690				1475		1520		890				
3	685				1500		1540		895				
4	680				1420		1455		815				
5	730	2-8001-090			935				600				
6	670				805				715				
7	650				610								
8	585	2-8001-070			765	2-8001-050							
9	995												
10	890												
11	605												
12	765	2-8001-050											
L/MID (5kg)													
	A				B				BR				
1	1070	2-8001-190			1310	2-8001-070			2540	2-8001-070			
2	1040				1430				2345				
3	1040								2515				
4	990												
5	1320	2-8001-130											
6	1530												
MAIN (5kg)													
	A				B		B		BR				
1	5120	2-8001-340			5310	2-8001-230			2100	2-8001-090			
2	5060	-10kg			5230				1400+300	TGL220			
3	4315	2-8001-230			4375	2-8001-130							
STB MAIN					5405	2-8001-090							



5. Line Length [Camino2 L]

Upper (5kg)													
	a		aa		b		c		br				
1	415	2-8001-090	375	2-8001-090	495	2-8001-050	505	2-8001-050	825	2-8001-050			
2	415	2-8001-070	370	2-8001-070	440		450		590				
3	405		365		460		470		770				
4	430		385		480		490		740				
5	390	2-8001-090	350	2-8001-090	475		485		775				
6	400	2-8001-070	355	2-8001-070	415		425		580				
7	390		355		435		450		590				
8	460		425		445		450		660				
9	410	2-8001-050			400				615				
10	350				325				520				
11	370				370				400				
12	365				360				550				
13	355				355								
14	320				320								
15	955				950								
16	1165				1150								
17	270				285								
18	260				290								
H/MID (5kg)													
	A				B		C		BR				
1	760	2-8001-130			1590	2-8001-070	1640	2-8001-050	1305	2-8001-050			
2	715				1530		1580		920				
3	705				1555		1600		930				
4	705				1475		1515		850				
5	755	2-8001-090			975	2-8001-050			620				
6	695				835				745				
7	675				635								
8	605				790								
9	1035	2-8001-070											
10	925												
11	635												
12	790	2-8001-050											
L/MID (5kg)													
	A				B				BR				
1	1110	2-8001-190			1360	2-8001-070			2640	2-8001-070			
2	1085				1485				2440				
3	1080								2615				
4	1030												
5	1375	2-8001-130											
6	1590												
MAIN (5kg)													
	A				B		B		BR				
1	5345	2-8001-340			5540	2-8001-230			2265	2-8001-090			
2	5285	-10kg			5460				1400+300	TGL220			
3	4505	2-8001-230			4575	2-8001-130							
STB MAIN					5645	2-8001-090							

6. Materials

Model		Camino2
Fabric of Canopy	Top	Porcher 70032 E4G, 70000 E3H
	Bottom	Porcher 70000 E3H
	Profile, Pocket Diagonal	Porcher 70000 E91
	Band	Porcher 70032 E4D
	Bridle	NYLON 10mm
Suspension Line		Edelrid 2-8001-050, 070, 090, 130 2-8001-190, 230, 340 TGL 220
Riser		Polyester 12mm Kevlar webbing Leechine 4mm Coated Dyneema
Maillons		Stainless steel Ø 3.00mm
Thread		Amann & Söhne-Mill Faden 225D/3 Polyester bonded

